



3 year guarantee



## RESCUE



0082



0120

UIAA

EN 12278: 2007 7 < Ø < 13 mm




individually tested

XF 494-2004: FZL-H-T 9.5/13

- Field of application (text part)  
Champ d'application (partie texte)

### 2. Nomenclature

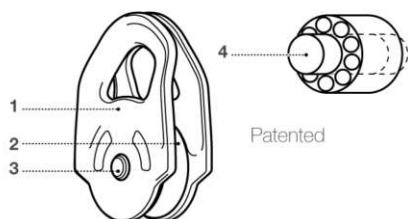

### NFPA CERTIFICATION FOR RESCUE P50

MEETS THE PULLEY REQUIREMENTS OF NFPA 1983, INCORPORATED IN THE 2022 EDITION OF NFPA 2500.

RÉPOND AUX EXIGENCES NFPA 1983, DE L'ÉDITION 2022 DE LA NFPA 2500 POUR LES POULIES.



**PULLEY: MBS 36 kN  
G (GENERAL USE)  
MEETS NFPA 2500  
(1983) - 2022**

After removing the notice from the equipment, make a copy of it and keep the original as part of a permanent record that includes the usage and inspection history for the equipment. Keep the copy of the notice with the equipment and refer to it before and after each use. Additional information regarding auxiliary equipment can be found in NFPA 1500 and NFPA 1858 and NFPA 1983, incorporated in the 2022 edition of NFPA 2500.

Après avoir retiré la notice de l'équipement, en faire une copie et copier et conserver l'original dans un dossier permanent qui comprend l'historique de l'utilisation d'utilisation et d'inspection de l'équipement. Conservez la copie de la notice avec l'équipement et consultez-la avant et après chaque utilisation. Des informations complémentaires sont disponibles dans la NFPA 1500, NFPA 1858 et NFPA 1983, incorporées dans l'édition 2022 de la norme NFPA 2500.

Distributed by:



### 5. Strength

Résistance

#### 5A. Working load limit / Valeur d'utilisation maxi



#### 5B. Breaking load / Charge de rupture



### 3. Inspection, points to verify

Contrôle, points à vérifier




**PPE checking**  
Vérification EPI

PETZL.COM



### 4. Compatibility


Compatibilité




### 6. Efficiency

Rendement


#### 6A. Simple pulley system

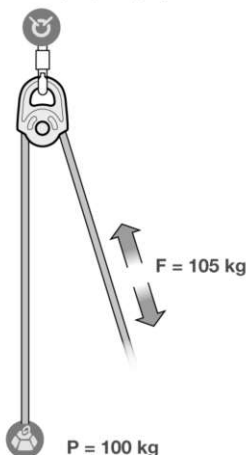


#### with progress capture

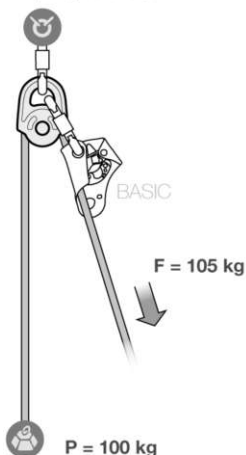


#### 6B. 2:1 hauling system

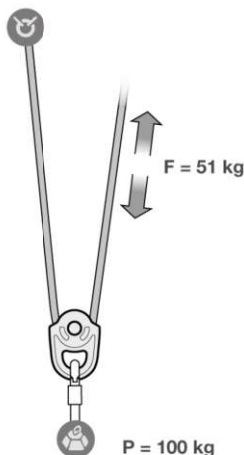

#### 6c. 3:1 hauling system with progress capture

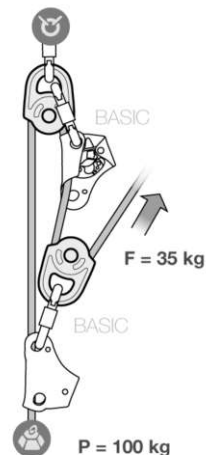

Theoretical force



$F = P$

$F = 1,05 P$

$F = 2 P$

$F = 0,5 P$

$F = 0,51 P$


$F = 0,66 P$

$F = 0,33 P$


$F = 0,35 P$

$F = 0,57 P$


## 7. Progress capture systems Systèmes anti-retour

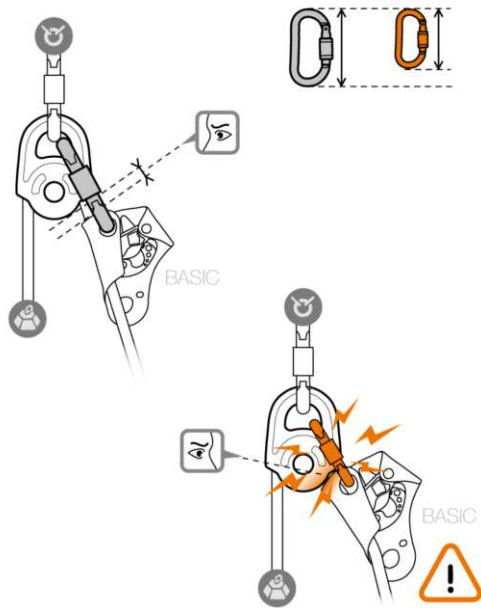

## 8. Positioning and redirection Positionnement et renvoi

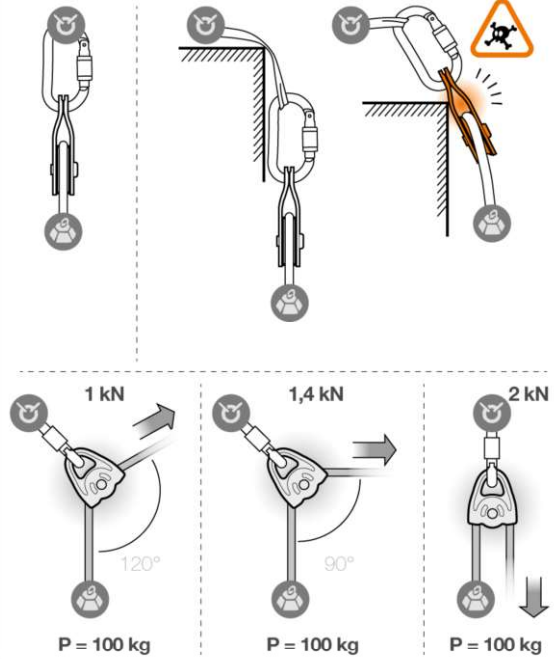

## Traceability and markings Traçabilité et marquage

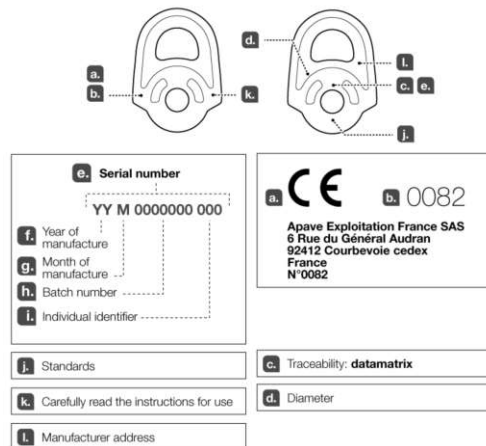

## China standards / 中国标准

When operating under the XF 494-2004: FZL-H-T 9.5/13 standard for firefighters, use only a 9.5-13 mm diameter Light or General Use kernmantle Life Safety Rope.

当在消防的XF 494-2004标准下使用时，只能使用直径9.5-13 mm的轻型或通用夹芯安全绳索

**Distributed by:**



UK  
CA  
0120

This product is compliant with the Regulation 2016/425 on Personal Protective Equipment as brought into UK law and amended.  
Ce produit est conforme au règlement 2016/425 sur les équipements de protection individuelle tel que transposé en droit britannique et modifié.

Approved Body performing the UKCA type examination:  
Organisme approuvé intervenant pour l'examen UKCA de type :

**SATRA Technology Centre Limited**  
Wyndham Way, Telford Way,  
Kettering, Northamptonshire,  
NN16 8SD, United Kingdom.  
N° 0321

Approved body responsible for the production control of this PPE:  
Organisme approuvé responsable du contrôle de production de cet EPI :

**SGS United Kingdom Ltd**  
Inward Way  
Rossmore Business Park  
Ellesmere Port, Cheshire, CH65 3EN  
United Kingdom  
N° 0120

Authorized Representative in UK : PETZL UK Agency, Unit 3-7, Tebay Business Park, Old Tebay, Penrith, CA10 3SS, United Kingdom