

> the smallest lighting device of the Sirocco range

## sirocco LED E27



### standard version



### dimensions and packaging


Envelope size	ø 60 cm / h 45 cm ø 23 in / h 17 in
P200CL stand height	up to 280 cm - 110 in
Net weight of the balloon	2,7 kg - 5,9 lbs
<b>Metallic case (integrated handle)</b>	
Case dimensions	L 58 x w 30 x h 22 cm L 22 x w 11 x h 8 in
Content: full set lighting balloon (with stand), 3 lamps, 1 user manual, 1 glove, 1 repair patch kit	
Net weight with stand	8 kg - 17,6 lbs

**Distributed by:**



### lighting data

Open core area lighting requirement (EN 1838 standard)	450 m <sup>2</sup> 4,843 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (EN 12464-2 standard)	90 m <sup>2</sup> 968 ft <sup>2</sup>
Light under the balloon (3 m high)	56 lx - 5,2 fc
Maximum lumen	7 500 lm
Colour temperature: warm	2 700 K

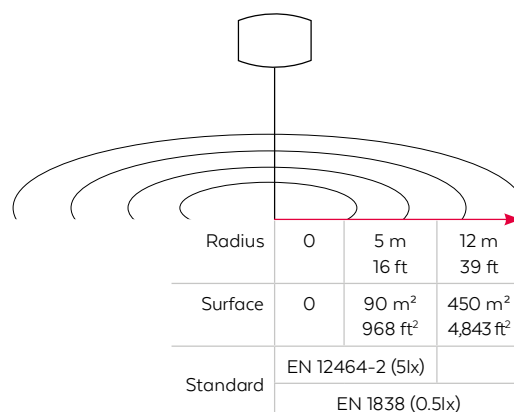

How to read the drawing: in a range of 12 m - 39 ft, being a surface of 450 m<sup>2</sup> - 4,843 ft<sup>2</sup>, we guarantee a lighting in accordance with the EN 1838 standard.

### technical data

Lamps	3 x 21 W LED
Average LED life*	25 000 h
Efficiency	120 lm/W
Type of lamp holder	E27
Maximum power	150 W
Available voltage	100-120-230 V / 50-60 Hz
Restrike time	instant
Power supply	main power or battery + converter
Envelopes options	multiple envelope colours, without reflector or with reverse reflector

\* Under normal conditions of use

### security

Flame-retardant fabric	
Silver internal reflector improving lumens below the balloon, increasing light to the work area and reduce light pollution	
Rain and dust proof material	IP54